



# JXCS1 Series

Changeover Switch



[www.jinxu.cc](http://www.jinxu.cc)


# JXCS1 Series Changeover Switch

## Application


The Changeover Switch can switch on, Load and break the circuit under normal conditions, using as SwitchDisconnectors.

## Main Technical Parameter

Pole	1P 2P 3P 4P	
Technical Data	Rated Voltage	230/400V
	Rated Current	16,25,32,40,63A
	Rated Frequency	50/60Hz
	Contact form	1-0-2
ElectricalFeatures	Electrical Life	1500 Cycles
	Mechanical Life	8500 Cycles
	Protection degree	Ip20
ElectricalFeatures	Ambient Temperature	-5°C..40°C
	Terminal/Cable size	16mm <sup>2</sup>
	Mounting	On DIN rail EN60715(35mm) by means of fast clip device.



## Circuit Diagram

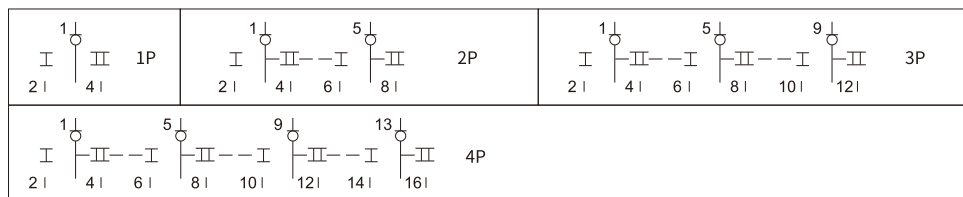

## Outline & Installation Dimension(mm)

