

JXA5 series Single phase rail-mounted intelligent relay switch




Overview

JXA5 series single-phase rail-mounted intelligent relay switch is a product that meets users' needs for circuit protection and control. The function of this product are metering, timing, fault protection, remote control, and local control.

Functional Features

- Supports multiple control platforms such as Tuya APP
- Supports local or remote operation for turning on and off
- Supports DIN-rail mounting
- Remote control without distance limitations
- Supports customization of protection thresholds

Model And Meaning

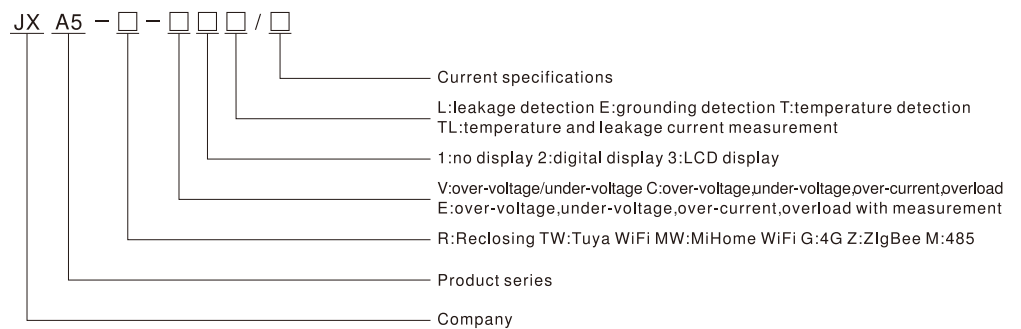

Technical Parameters

	A5 series	
Reference voltage	220V、230V	
Specified operating voltage	90%Un~110%Un	
Extended operating voltage	80%Un~115%Un	
Current specification	6-63A	
Frequency range	(50 -60) Hz	
Power consumption	Voltage circuit: ≤1.5W、6VA	
Communication	Tuya WIF1	<input checked="" type="checkbox"/>
Operating temperature	-20℃~70℃	
Operating humidity	≤95%	
Dustproof and waterproof	Ip20	
Product size	91.3mm*36mm*66.5mm	
Measurement and metrology	voltage	<input checked="" type="checkbox"/>
	electric current	<input type="checkbox"/>
	active power	<input type="checkbox"/>
	total active energy	<input type="checkbox"/>
Display	LCD	
Voltage accuracy	Class 2.0(with energy metering function Class 1.0)	
Current accuracy	Class 2.0(with energy metering function Class 1.0)	
Active power accuracy	Class 2.0	
Overvoltage protection	Protection switch: overvoltage value; recovery value; judgment and recovery time.	<input checked="" type="checkbox"/>
Undervoltage protection	Protection switch: undervoltage value; recovery value; judgment and recovery time.	<input checked="" type="checkbox"/>
Overcurrent protection	Protection switch: overcurrent value; judgment time.	<input type="checkbox"/>


Conventional features Optional features(Depending on different models)

JXA5 series Single phase rail-mounted intelligent relay switch

Product Wiring Diagram



Product Dimensions Diagram

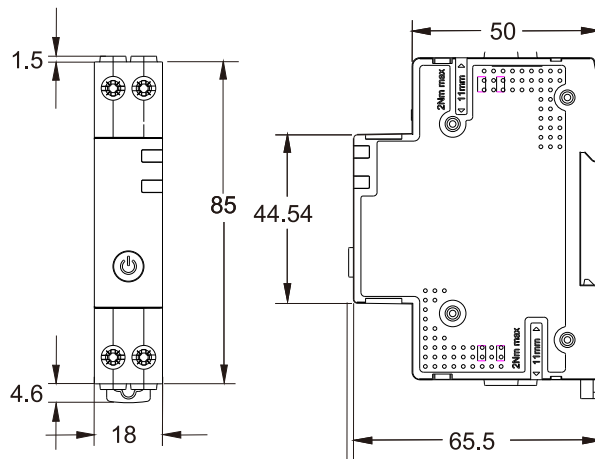

Panel Diagram

Turn off: No network
 Flash : Connecting
 Green light : normal
 turn on : Relay open
 Turn off : Relay closed

ON/OFF
 Networking button

