

JXD-1M, JXD-2M, JXD-3M Modular Signal Lamp



JXD-1M



JXD-2M



JXD-3M

Application

The Modular Signal Lamp is applicable to circuit with rated voltage 230V~ and frequency 50/60Hz for visual indication and signaling.

Technical Data

Construction and Feature

Low service duration, minimum power consumption

Compact design in modular size

Easy installation


Technical Data

Rated voltage	230V AC, 100V AC, 48V AC/DC, 24V AC/DC
Rated frequency	50/60Hz
Colour	JXD-1M Red/Green/Yellow JXD-2M Red/Green JXD-3M Red/Green/Yellow
Connection terminal	Pillar terminal with clamp
Connection capacity	Rigid conductor 2.5mm ²
Installation	On symmetrical DIN rail 35mm

JXD-1M, JXD-2M, JXD-3M Modular Signal Lamp

Max power	0.06W
Illumination	LED
Service duration	30,000 hours

Circuit Diagram

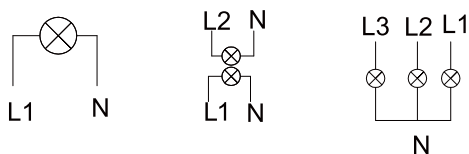

Overall and Installation Dimension(mm)

